


# 食品级复合软管 CH06

## Food grade composite hose CH06

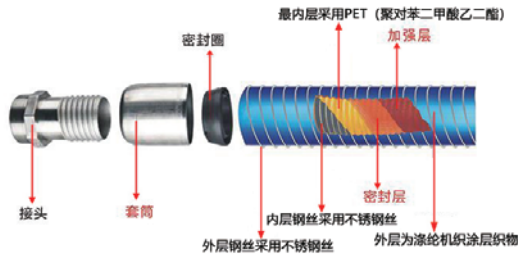

### 产品应用:

软管结构非常轻便和灵活，易于清洗处理。但仍然非常结实，耐磨。且成本低。颜色和尺寸支持定制，可以配置各种类型接头。常用于食品行业中液体或半液体的输送。

### Product application:

The hose structure is very light and flexible, easy to clean. But it is still very strong and wear-resistant. And the cost is low. The color and size support customization, and various types of connectors can be configured. It is often used in the transportation of liquid or semi liquid in the food industry.

### 材料结构:

- 内螺旋: 不锈钢丝
- 外螺旋: 不锈钢丝
- 内管: PET (聚对苯二甲酸乙二酯)
- 最外面: 涤纶机织涂层织物

### Material structure:

- Inner screw: stainless steel wire
- Outer screw: stainless steel wire
- Inner tube: pet (polyethylene terephthalate)
- Outermost: polyester woven coated fabric

### 尺寸规格:

- 内径: Ø25mm---253mm (支持定制)
- 标准长度: 40m (支持定制)
- 工作温度范围: -30°C / +120°C

### Dimensions:

- Internal diameter : Ø25mm---253mm (Support customization)
- Standard length : 40m(Support customization)
- Length operating temperature range : -30°C / +120°C

### 适用流体类型

### Applicable fluid type



## Composite hose

品名 PART NAME	内径 INNER DIA		弯曲半径 BEND RADIUS	工作压力 WORK PRESSURE		爆破压力 BURST PRESSURE		标准长度 STANDARD LENGTH
	(mm)	(inch)		Bar	psi	Bar	psi	
CH06-025	25	1"	100	16	232	48.0	696	40
CH06-038	38	1-1/2"	112	16	232	48.0	696	40
CH06-051	51	2"	150	16	232	48.0	696	40
CH06-065	65	2-1/2"	190	16	232	48.0	696	40
CH06-076	76	3"	225	16	232	48.0	696	40
CH06-102	102	4"	350	16	232	48.0	696	40
CH06-152	152	6"	600	16	232	48.0	696	20
CH06-203	203	8"	850	16	232	48.0	696	20
CH06-253	253	10"	1150	16	232	48.0	696	20

### 产品优势

### Product advantages

