


# 抗静电耐溶剂内衬氟橡胶硅胶管

Antistatic solvent resistant fluorine rubber lined silicone hose

# FV30S

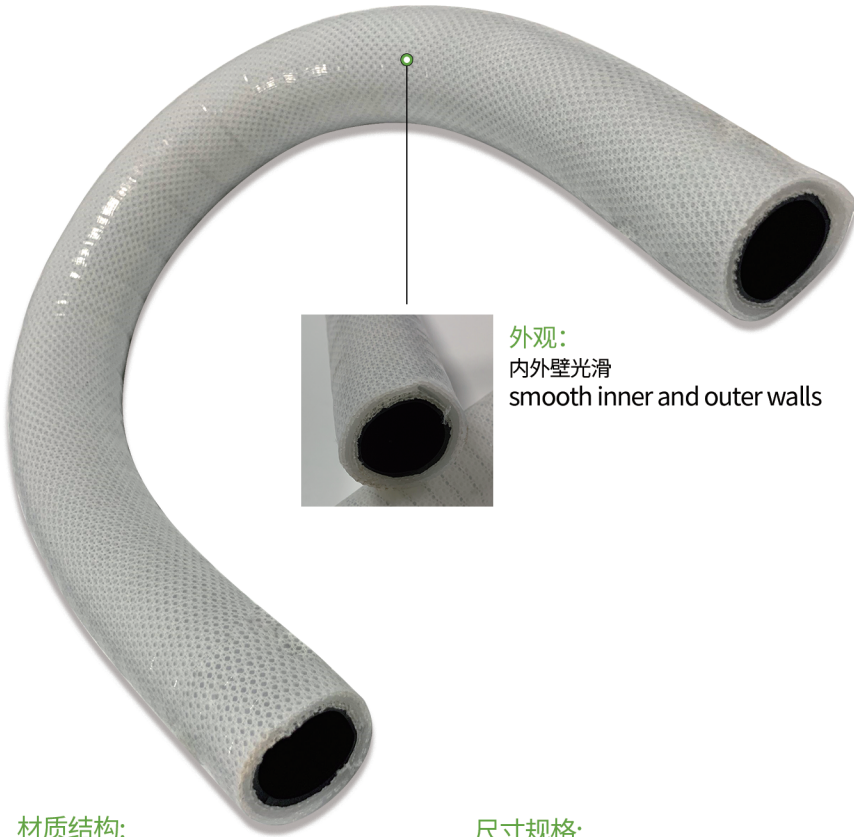

外观：  
内外壁光滑  
smooth inner and outer walls

### 产品应用：

特别推荐输送与硅酸不相容的腐蚀性液体，例如酸碱溶剂或化学化工类油液。也适用于高温下运输易燃易爆等对静电有要求的腐蚀性液体。

### Product application:

It is especially recommended to transport corrosive liquids incompatible with silicic acid, such as acid-base solvents or chemical oil. It is also suitable for transporting flammable, explosive and other corrosive liquids requiring static electricity at high temperature.

## Food Grade Silicone Hose

### 产品特点优势



### 材质结构:

内管：黑色导电FKM 氟橡胶 (VITON橡胶)  
外管：食品级铂金硅胶  
增强层：螺旋不锈钢丝+四层聚酯纤维编织布

### Material structure:

Inner tube: black conductive FKM fluororubber (Viton rubber)  
Outer tube: food grade platinum silica gel  
Reinforcing layer: spiral stainless steel wire + four layers of polyester fiber woven cloth

### 尺寸规格:

内径：Ø13mm---102mm (支持定制)  
标准长度：6M/10M  
工作温度范围：-40°C / +200°C

### Dimensions:

Internal diameter: Ø13mm---102mm (Support customization)  
Standard length: 6M/10M  
Length operating temperature range: -40°C / +200°C

### 适用流体类型



品名 (Part No)	内径 INNER DIA		壁厚 WALL THICKNESS +1.0/-0.5mm	外径 OUTER DIA		拆弯半径 BEND RADIUS (mm)	工作压力 WORK PRESSURE		爆破压力 BURST PRESSURE		长度 (STANDARD LENGTH) m/roll	真空度 VACUUM
	(mm)	(inch)		(mm)	(inch)		Bar	psi	Bar	psi		
FV30S-013	13	1/2	5.5	24	0.9449	45	17.2	249.4	51.6	748.2	6或10	0.91 Bar (13.23 psi)
FV30S-016	16	5/8	5.5	27.0	1.06	52	15.7	227.65	47.1	682.95	6或10	0.91 Bar (13.23 psi)
FV30S-019	19	3/4	5.5	30	1.1811	61	14.5	210.25	43.5	630.75	6或10	0.91 Bar (13.23 psi)
FV30S-025	25	1	5.5	36.0	1.42	75	12.3	178.35	36.9	535.05	6或10	0.91 Bar (13.23 psi)
FV30S-032	32	1-1/4	5.5	43	1.6929	108	11.0	159.5	33.0	478.5	6或10	0.91 Bar (13.23 psi)
FV30S-038	38	1-1/2	5.5	49.0	1.93	120	10.0	145	30.0	435	6或10	0.91 Bar (13.23 psi)
FV30S-051	51	2	5.5	62	2.4409	160	8.0	116	24.0	348	6或10	0.91 Bar (13.23 psi)
FV30S-057	57	2-1/4	5.5	68.0	2.68	169	7.2	104.4	21.6	313.2	6或10	0.91 Bar (13.23 psi)
FV30S-063	63	2-1/2	5.5	74	2.9134	195	6.7	97.15	20.1	291.45	6或10	0.91 Bar (13.23 psi)
FV30S-076	76	3	6	88.0	3.46	242	6.0	87	18.0	261	6或10	0.91 Bar (13.23 psi)
FV30S-090	90	3-1/2	6	102	4.0157	320	5.5	79.75	16.5	239.25	6	0.91 Bar (13.23 psi)
FV30S-102	102	4"	6.5	115.0	4.53	410	5.0	72.5	15.0	217.5	6	0.91 Bar (13.23 psi)